

imageRUNNER ADVANCE C5500 III series

HIGH PERFORMANCE OFFICE COMMUNICATION PLATFORM



Canon uniFLOW Online
Outstanding Cloud Collaboration Solution




Canon Inc.
imageRUNNER ADVANCE C5535i
Outstanding 41- to 49-ppm A3 Colour MFP



Canon Inc.
imageRUNNER ADVANCE C5550i
Outstanding 41- to 50-ppm A3 Colour MFP

MAIN CONFIGURATION OPTIONS

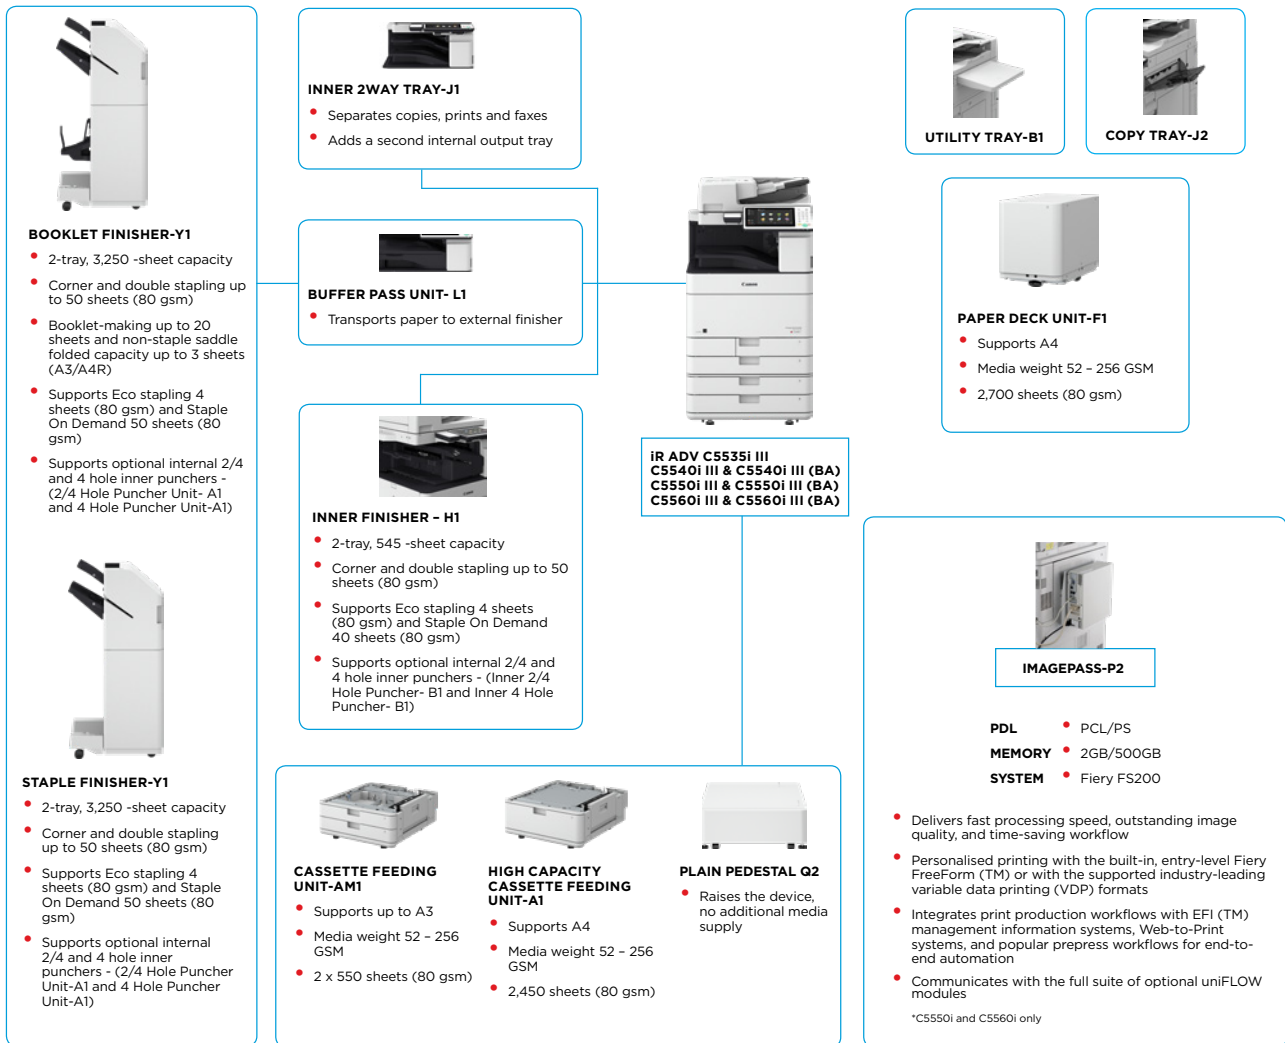

This flat configuration is for illustration purpose only. For a complete list of options and the exact compatibility relationships, please refer to the online product configurator.

III* indicates that this model has been upgraded to new system software and includes additional security features as standard.

TECHNICAL SPECIFICATIONS

imageRUNNER ADVANCE C5500 III series

MAIN UNIT

Machine type
Core functions
Processor
Control Panel
Memory
Hard Disk drive
Mirroring Hard Disk Drive
Interface Connection

A3 Colour Laser Multifunctional
 Print, Copy, Scan, Send, Store and Optional Fax
 Canon Dual Custom Processor (Shared)
 25.6 cm (10.1 inch) TFT LCD WSVGA Colour Touch panel
 Standard: 4.0GB RAM
 Standard: 250GB Maximum: 1TB
 Optional: 250GB, 1TB

Paper Supply Capacity (A4, 80gsm)

NETWORK
 Standard: 1000Base-T/100Base-TX/10Base-T, Wireless LAN (IEEE 802.11 b/g/n);
 Optional: NFC, Bluetooth Low Energy
OTHERS
 Standard: USB 2.0 (Host) x2, USB 3.0 (Host) x1, USB 2.0 (Device) x1;
 Optional: Serial Interface, Copy Control Interface
 Standard: 1,200 sheets
 2 x 550-sheet cassettes, 100-sheet multi-purpose tray
 Maximum: 6,350 sheets (with HIGH CAPACITY CASSETTE FEEDING UNIT-A1 + PAPER DECK UNIT-F1)

Paper output capacity (A4, 80gsm)

Standard: 250 sheets
 Maximum: 3,450 Sheets (with STAPLE FINISHER-Y1 or BOOKLET FINISHER-Y1 and COPY TRAY-J2)

Finishing capabilities

Standard: Collate, Group
 With Inner Finisher : Collate, Group, Offset, Staple, Hole Punch*1, Staple-Free Staple, Staple On Demand
 With External Finisher*2 : Collate, Group, Offset, Staple, Saddle Stitch*3, Hole Punch*4, Staple-Free Staple, Staple On Demand

*1 Requires Inner 2/4 Hole Puncher-B1 or Inner 4 Hole Puncher-B1
 *2 Requires Buffer Pass-L1
 *3 Requires Booklet Finisher-Y1
 *4 Requires 2/4 Hole Puncher Unit-A1 or 4 Hole Puncher Unit-A1

Supported media types

Upper Cassette 1:
 Thin, Plain, Thick, Colour, Recycled, Pre-punched, Transparency, Bond, Envelope, Letterhead
 Lower Cassette 2:
 Thin, Plain, Thick, Colour, Recycled, Pre-punched, Transparency, Tab*, Bond, Envelope, Letterhead
 *Requires TAB FEEDING ATTACHMENT-F1

Supported media sizes

Multi-purpose tray:
 Thin, Plain, Thick, Colour, Recycled, Pre-punched, Transparency, Tracing*, Label, Tab, Bond, Coated, Envelope, Letterhead
 * Some types of tracing paper cannot be used.
 Upper Cassette 1:
 Standard size: A4, A5, A5R, A6R (Simplex only), B5, Envelope
 [No.10 (COM10), DL, ISO-C5]
 Custom size:
 Min. 98.0 x 148.0 mm up to 297.0 x 215.9 mm
 Lower Cassette 2:
 Standard size: A3, A4, A4R, A5, A5R, A6R (Simplex only), B4, B5, B5R, Envelope
 [No.10 (COM10), Monarch, DL, ISO-C5]
 Custom size:
 Min. 98.0 x 182.0 mm up to 304.8 x 457.2 mm

Supported media weights

Multi-purpose tray:
 Standard size: SRA3, A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R, Envelopes [No. 10 (COM 10), Monarch, ISO-C5, DL]
 Envelope Custom Size
 (Min. 98.0 x 98.4 mm up to 320.0 x 457.2 mm).
 Custome Size:
 Min. 98.0 x 139.7 mm up to 320.0 x 457.2 mm
 Free Size: Min. 98.0 x 139.7 mm up to 320.0 x 457.2 mm

Warm-up Time

Cassettes: 52 to 256 gsm
 Multi-purpose tray: 52 to 300 gsm
 Duplex: 52 to 220 gsm
 From Power On: 10 Seconds or less*
 * Time from device power-on, until copy ready (not print reservation).
 From Sleep Mode: 10 Seconds or Less
 Quick Startup Mode: 4 Seconds or less*
 * Time from device power-on to when key operation can be performed on the touch panel display.

Dimensions (W x D x H)

iR-ADV C5560i III/C5550i III/C5540i III/iR-ADV C5535i III:
 620 x 742 x 950 mm
 [iR-ADV C5560i III/C5550i III/C5540i III (BA models) :
 620 x 866 x 950 mm]

Installation Space (W x D)

iR-ADV C5560i III/C5550i III/C5540i III/iR-ADV C5535i III
 Basic: 980 x 1,176 mm
 (Right Cover Open + Cassette Drawers Open)
 Fully Configured: 1,866 x 1,176 mm (Booklet Finisher-Y1 with the extension tray extended + Paper Deck Unit-F1 + Cassette Drawers open)
 [iR-ADV C5560i III/C5550i III/C5540i III (BA models) :
 Basic: 980 x 1,300 mm
 (Right Cover Open + Cassette Drawers Open)
 Fully Configured: 1,866 x 1,300 mm (Booklet Finisher-Y1 with the extension tray extended + Paper Deck Unit-F1 + Cassette Drawers open)]

Weight

iR-ADV C5560i III/C5550i III/C5540i III/iR-ADV C5535i III:
 Approx.142 kg including toner
 [iR-ADV C5560i III/C5550i III/C5540i III (BA models) :
 Approx. 143 kg including toner]

PRINT SPECIFICATIONS

Print Speed (BW/CL)

iR-ADV C5560i III
 60 ppm (A4), 32 ppm (A3), 36 ppm (A4R), 60 ppm (A5R), 60 ppm (A6R)

iR-ADV C5550i III
 50 ppm (A4), 27 ppm (A3), 30 ppm (A4R), 50 ppm (A5R), 50 ppm (A6R)

iR-ADV C5540i III
 40 ppm (A4) 22 ppm (A3), 24 ppm (A4R), 40 ppm (A5R), 40 ppm (A6R)

iR-ADV C5535i III
 35 ppm (A4), 18 ppm (A3), 23 ppm (A4R), 35 ppm (A5R), 35 ppm (A6R)

Print Resolution (dpi)

600 x 600, 1,200 x 1,200 (up to)

Page description languages

Standard: UFR II, PCL 6, Genuine Adobe PostScript Level 3

Direct Print

Direct printing available from USB memory, Advanced Space, Remote UI and Web Access*
 Supported file types: TIFF, JPEG, PDF, EPS, and XPS
 * Only PDF print from websites is supported

Printing from mobile and cloud

AirPrint, Mopria, Google Cloud Print, and Canon PRINT Business, and uniFLOW Online. A range of software and MEAP-based solutions are available to provide printing from mobile devices or internet-connected devices and cloud-based services depending on your requirements. Please contact your sales representative for further information

Fonts

PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andalé Mono WT J/K/S/T*1 (Japanese, Korean, Simplified and Traditional Chinese), Barcode fonts*2 PS fonts: 136 Roman

*1 Requires optional PCL International Font Set-A1

*2 Requires optional Barcode Printing Kit-D1

Print Features

Suspend Job Timeout, Subset Finishing (PS only), Profile Settings, Secured Print, Watermark, Header/Footer, Page Layout, Two-sided Printing, Collating, Booklet Printing, Grouping, Mixed Paper Sizes/ Orientations, Offsetting, Front/Back Covers, Toner Reduction, Poster Printing, Forced Hold Printing

Operating System

UFR II: Windows 7 / 8.1 / 10 / Server 2008 / Server 2008 R2 / Server 2012 / Server 2012 R2 / Server 2016, MAC OS X (10.7 or later)
 PCL: Windows 7 / 8.1 / 10 / Server 2008 / Server 2008 R2 / Server 2012 / Server 2012 R2 / Server 2016
 PS: Windows 7 / 8.1 / 10 / Server 2008 / Server 2008 R2 / Server 2012 / Server 2012 R2 / Server 2016, MAC OS X (10.7 or later)
 PPD: MAC OS X (10.7 or later), Windows 7 / 8.1 / 10

SAP Device Types are available via the SAP Market Place. Please refer to <http://www.canon-europe.com/support/business-product-support> for availability of print solutions for other operating systems and environments including AS/400, UNIX, Linux and Citrix. Some of these solutions are chargeable.

COPY SPECIFICATIONS

Copy Speed (BW/CL)

iR-ADV C5560i III
 60 ppm (A4), 32 ppm (A3), 36 ppm (A4R), 60 ppm (A5R), 60 ppm (A6R)

iR-ADV C5550i III
 50 ppm (A4), 27 ppm (A3), 30 ppm (A4R), 50 ppm (A5R), 50 ppm (A6R)

iR-ADV C5540i III
 40 ppm (A4) 22 ppm (A3), 24 ppm (A4R), 40 ppm (A5R), 40 ppm (A6R)

iR-ADV C5535i III
 35 ppm (A4), 18 ppm (A3), 23 ppm (A4R), 35 ppm (A5R), 35 ppm (A6R)

iR-ADV C5560i III: Approx. 2.9/4.5 seconds or less
 iR-ADV C5550i III: Approx. 3.5/5.2 seconds or less
 iR-ADV C5540i III: Approx. 4.1/6.1 seconds or less
 iR-ADV C5535i III: Approx. 4.9/7.4 seconds or less

First-Copy-Out Time (A4, BW/CL)

Copy resolution (dpi)

Reading: 600 x 600
 Printing: Up to 1,200 x 1,200

Multiple Copies

Up to 999 copies

Copy Density

Automatic or Manual (9 Levels)

Magnification

25% - 400% (1% Increments)

Preset Reductions

25%, 50%, 70%

Preset Enlargements

141%, 200%, 400%

Basic Copy Features

Preset R/E Ratios by Area, Paper Setting, Previous Setting, Favourite Setting, Finishing, Two-Sided, Density Adjustment, Original Type Selection, Interrupt Mode, Setting Confirmation/Cancel

Special Copy Features

Book to Two Pages, Two-sided Original, Finishing, Booklet, Job Build, N on 1, Add Cover, Insert Sheets, Different Size Originals, Density Adjustment, Original Type Selection, Transparency Cover Sheets, Page Numbering, Copy Set Numbering, Sharpness, Erase Frame, Secure Watermark, Print Date, Shift, Gutter, Print & Check, Negative/Positive, Repeat Images, Merge Job Blocks, Job Done Notice, Mirror Image, Print on Tab, Store in Mail Box, Superimpose Image, Copy ID Card, Skip Blank Pages, Detect Feeder Multi Sheet Feed, Free Size Original

SCAN SPECIFICATIONS

Type

Colour Platen and Single-pass Duplexing Automatic Document Feeder** [2-sided to 2-sided (Automatic)]

** Detect Feeder Multi Sheet Feed is supported.

Document Feeder Paper Capacity * (80 gsm)

150 Sheets



TECHNICAL SPECIFICATIONS

imageRUNNER ADVANCE C5500 III series

Acceptable Originals and weights	Platen: Sheet, Book, 3-Dimensional Objects (Height: Up to 50 mm, Weight: up to 2kg)	Network	Standard: IP/Mac Address Filtering, IPSEC, TLS Encrypted Communication, SNMP V3.0, IEEE 802.1X, IPv6, SMTP Authentication, POP Authentication before SMTP, S/MIME
Supported media sizes	Document Feeder media weight: 1-sided scanning: 38 to 157 gsm (BW) /64 to 157 gsm (CL) 2-sided scanning: 50 to 157 gsm (BW) /64 to 157 gsm (CL) Platen: max. scanning size: 297.0 x 431.8 mm Document Feeder media size: A3, A4, A4R, A5, A5R, B4, B5, B5R, B6R, Custom size: 128.0 x 139.7 mm to 304.8 x 431.8 mm	Document	Standard: Secure Print, Adobe LiveCycle® Rights Management ES2.5 Integration, Encrypted PDF, Encrypted Secure Print, Device signature, Secure Watermarks Optional: User signature, Document Scan lock
Scan Speed (ipm: BW/CL; A4) 7	Single-sided Scanning: 80 /80 (300dpi) , 80 /60 (600 dpi) Double-sided Scanning: 160 /160 (300dpi) , 150 /80 (600 dpi)	ENVIRONMENTAL SPECIFICATIONS	Temperature: 10 to 30 °C Humidity: 20 to 80 % RH (Relative Humidity) 220-240 V (±10 %), 50/60 Hz (±2 Hz), 6 Amp CEE 7/7 (230V)
Scan Resolution (dpi)	600 x 600, 400 x 400, 300 x 300, 200 x 400, 200 x 200, 200 x 100i, 150 x 150, 100 x 100	Operating Environment	Maximum: Approx. 1,800 W Printing: Approx. 906 W *1 Standby: Approx. 64.8 W *1 Sleep mode: Approx. 0.8 W *2 Plugin Off: Approx. 0.13W *3
Pull Scan Specifications	Colour Network ScanGear2. For both TWAIN and WIA Supported OS: Windows 7/8.1/10 Windows Server 2008/Server 2008 R2/Server 2012/Server 2012 R2/Server 2016	Power source	
Scan Method	Send functionality available on all models Scan to USB Memory: Available on all models Scan to Mobile Devices and cloud-based services: A range of solutions is available to provide scanning to mobile devices or cloud-based services depending on your requirements. Please contact your sales representative for further information.	Plug (Main Unit)	
Scanning software	TWAIN/WIA Pull scanning available on all models Network ScanGear: TWAIN-compliant scanner driver that enables computers on a network to use the pull scan functionality of the device	Power consumption	
SEND SPECIFICATIONS		Noise levels (BW/CL)	
Destination	E-mail/Internet FAX (SMTP), SMB v3.0, FTP, WebDAV, Mail Box, Super G3 FAX(Optional), IP Fax(Optional)		
Address Book	LDAP (2,000)/Local (1,600)/Speed dial (200)		
Send resolution (dpi)	600 x 600, 400 x 400, 300 x 300, 200 x 400, 200 x 200, 200 x 100, 150 x 150, 100 x 100		
Communication protocol	File: FTP (TCP/IP), SMB v3.0, WebDAV E-mail/1-Fax: SMTP, POP3		
File Format	Standard: TIFF, JPEG, PDF (Limited Colour, Compact, Searchable, Apply policy, Optimize for Web, PDF A/1-b, Encrypted), XPS (Compact, Searchable), Office Open XML (PowerPoint, Word), PDF/XPS (Device Signature) Optional: PDF (Trace & Smooth), PDF/XPS (User Signature)*		
Universal Send Features	Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density Adjustment, Sharpness, Copy Ratio, Erase Frame, Job Build, Sender's Name (TTI), Delayed Send, Preview, Job Done Notice, File Name, Subject/Message, Reply-to, E-mail Priority, TX Report, Original Content Orientation, Skip Blank Pages, Detect Feeder Multi Sheet Feed		
FAX SPECIFICATIONS			
Maximum Number of Connection Lines	2		
Modem Speed	Super G3: 33.6 kbps * G3: 14.4 kbps		
Compression Method	MH, MR, MMR, JBIG		
Resolution (dpi)	400 x 400, 200 x 400, 200 x 200, 200 x 100		
Sending/Recording Size	A3, A4, A4R, A5*, A5R*, B4, B5*, B5R* *1 Sent as A4 *2 Sent as B4		
FAX memory	Up to 30,000 pages * Max. 200		
Speed dials	Max. 199 dials		
Group dials/destinations	Max. 256 addresses		
Sequential broadcast	Yes		
Memory backup	Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density (for Scanning), Sharpness, Copy Ratio, Erase Frame, Job Build, Sender's Name (TTI), Selecting the Telephone Line, Direct Send, Delayed Send, Preview, Job Done Notice, TX Report, Detect Feeder Multi Sheet Feed		
Fax Features			
STORE SPECIFICATIONS			
Mail Box (Number supported)	100 User Inboxes, 1 Memory RX Inbox, 50 Confidential Fax Inboxes 30,000 Maximum Pages Stored		
Advanced Space	Communication Protocol: SMB or WebDAV Supported Client PC: Windows (Windows 7/8.1/10) Concurrent Connections (Max.): SMB: 64, WebDAV: 3 (Active Sessions)		
Advanced Space available disc space	Approx. 16GB (Standard HDD) Approx. 480GB (with option 1TB HDD)		
Advanced Space Features:	Authentication for Advanced Space Log-in, Sort Function, Printing a PDF File with a Password, imageWARE Secure Audit Manager Support Standard: USB Memory		
Memory Media			
SECURITY SPECIFICATIONS			
Authentication	Standard: Universal Login Manager (Device and Function Level Log-in), uniFLOW Online Express*, User Authentication, Department ID Authentication, Access Management System Optional: My Print Anywhere secure print (Requires uniFLOW) * No charge for this solution; however activation is required.		
Data	Standard: Trusted Platform Module (TPM), Hard Disk Password Lock, Hard Disk Drive Erase, Mail Box Password Protection, Hard Disk Drive Encryption (AES-256bit/CBC, FIPS140-2 Validated), Common Criteria Certification (DIN ISO 15408) Optional: Hard Disk Drive Mirroring, Hard Disk Drive removal, Data Loss Prevention (Requires uniFLOW)	Standards	
		CONSUMABLES	
		Toner Cartridges	C-EXV 51 TONER BK/C/M/Y C-EXV 51L TONER C/M/Y
		Toner Yield (Estimated @ 5% Coverage)	C-EXV 51 TONER BK: 69,000 pages C-EXV 51 TONER C/M/Y: 60,000 pages C-EXV 51L TONER C/M/Y: 26,000 pages
		SOFTWARE AND PRINTER MANAGEMENT	
		Tracking and reporting	Universal Login Manager* (ULM): Manage your costs easily by using the embedded reporting capability to identify and control costs on a user-based level by device. uniFLOW Online Express: Combining with ULM you can gain further control and highlight expenditures per users/department and pinpoint where costs can be scaled down from a central cloud based location. *Installation, activation & registration required
		Remote management tools	iW Management Console: Server-based software for centralised management of a fleet of devices (includes monitoring or consumables, status monitoring and alerts, distribution of address books, configuration settings, firmware and MEAP applications, meter capture and reporting, driver and resource management) eMaintenance: Compatible with eMaintenance services via embedded RDS (Enables meter capture, automatic consumables management, remote diagnostics and reporting for service providers to offer efficient, fast and proactive maintenance) Content Delivery System: Allows the Remote distribution of firmware, iR options and MEAP applications; Remote User Interface (RUI) Web based interface to each device that helps to provide remote device management and control
		FIERY PRINT CONTROLLER SPECIFICATIONS (EMBEDDED)	
		Optional/Standard	Optional on all models imagePASS P2 (Embedded)
		Name	1200 x 1200, 600 x 600
		Print Resolution (dpi)	Adobe PS3, PCL6
		Page Description Language(s)	4GB (1 x 4GB)
		Memory	500 GB SATA
		Hard Disk Drive	



TECHNICAL SPECIFICATIONS

imageRUNNER ADVANCE C5500 III series

Processor Speed	Intel Pentium G4400 (3.3 GHz)		
System	Fiery FS350		
Fonts	PS: 138 Fonts PCL: 113 Fonts		
Supported Operating Systems	Windows 7 32 and 64 bit / Windows 8.1 32 and 64 bit / Windows 10 32 and 64 bit / Windows Server 2012 64bit only / Windows Server 2012 R2 64bit only / Windows Server 2016 R2 64bit only / MAC OS (10.11, 10.12, 10.13, 10.14)		
Interface	2 x Ethernet (1000Base-T/100Base-TX/10Base-T), USB3.0 x 2 (Rear), USB2.0 x 4 (Rear)	Staple Finisher-Y1 (External)	Eco Staple: A3/A4/B4/B5: 5 sheets (52 to 64 gsm) 4 sheets (65 to 81.4 gsm) 3 sheets (81.5 to 105 gsm) Staple On Demand: 40 sheets (80 gsm) Dimensions (W x D x H): 466 x 525 x 225 mm Weight: Approx. 8.6 kg (Requires BUFFER PASS UNIT- L1) Number of Trays: 2 Upper Tray Capacity*: A4, A5, A5R, A6R, B5: 250 sheets, SRA3, A3, A4R, B4, B5R: 125 sheets Lower Tray Capacity*: A4, A5, A5R, B5: 3,000 sheets (Thin: 1500 sheets), SRA3, A3, A4R, B4, B5R: 1,500 sheets, A6R: 250 sheets (52 to 105 gsm), 50 sheets (106 to 300 gsm) * with 81.4 gsm paper Paper Weight: Upper Tray 52 to 256 gsm, Lower Tray 52 to 300 gsm Staple Position: Corner, Double Staple Capacity: Corner and Double Stapling: A4/B5: 50 sheets (52 to 90 gsm) A3/B4/A4R: 30 sheets (52 to 90 gsm) Eco Staple: A3/A4: 5 sheets (52 to 64 gsm) 4 sheets (65 to 81.4 gsm) 3 sheets (81.5 to 105 gsm) Staple On Demand: 50 sheets (90 gsm) Dimensions (W x D x H): 637 x 623 x 1,142 mm (when the extension tray is extended) Weight: Approx. 31 kg (Requires BUFFER PASS UNIT- L1) (Includes the above STAPLE FINISHER-Y1 basic staple specifications.) Saddle Stitch paper size: A3, A4R, B4, Custom Size (195.0 x 270.0 mm to 304.8 x 457.2 mm) Saddle Sttch Staple Capacity: 20 sheets x 10 sets (52 to 81.4 gsm) (including 1 cover sheet up to 256 gsm) Non Staple Folded Bunch Capacity: up to 3 sheets (52 to 105 gsm) Dimensions (W x D x H): 637 x 623 x 1,142 mm (when the extension tray is extended) Weight: Approx. 57 kg (Requires the INNER FINISHER-H1) Two or Four Holes Acceptable Punch Paper Weight: 52 to 300 gsm Acceptable Punch Paper Size: Two holes A3, A4, A4R, A5, B4, B5, B5R Four holes A3, A4 Power Source: From the Main Unit (Requires the INNER FINISHER-H1) Four Holes Acceptable Punch Paper Weight: 52 to 300 gsm Acceptable Punch Paper Size: Four holes A3, A4, A4R, A5, B4, B5, B5R Power Source: From the Main Unit (Requires either the STAPLE FINISHER-Y1 or BOOKLET FINISHER-Y1) Two or Four Holes Acceptable Punch Paper Weight: 52 to 300 gsm Acceptable Punch Paper Size: Two holes A3, A4, A4R, A5, B4, B5, B5R Four holes A3, A4 Power Source: From the Main Unit (Requires either the STAPLE FINISHER-Y1 or BOOKLET FINISHER-Y1) Four Holes Acceptable Punch Paper Weight: 52 to 300 gsm Acceptable Punch Paper Size: Four holes A3, A4, A4R, A5, B4, B5, B5R Power Source: From the Main Unit
Network protocols	TCP/IP (FTP, SMTP, POP, HTTP, SNMP, LDAP, SLP, SMB, LPD, IPP, WS-Discovery, Bonjour, Direct Mobile Printing, Port9100, SNT, 802.1X, DHCP, DNS, NTP)		
Direct Print	PDF1.7, EPS, TIFF6, JDF1.4/JMF(OP)		
VDP	FreeForm v1, v2.1		
Fiery Print Controller	Fiery Command WorkStation 6 / Paper Catalog / Fiery Spot-On / Fiery Remote Scan		
Standard Features	Fiery Impose / Fiery Compose / Fiery Impose and Compose / Productivity Package Web Activate (include Fiery JDF) / Fiery Hot Folders & Virtual Printers		
Fiery Print Controller Options	E400 Debian of Linux AC100-240V, 50Hz/60Hz, 3.0A (100V) - 1.3A (240V) 47 W 285 x 93 x 295 mm Fiery unit only (with plate): 4.95 kg		
HW Platform			
Base OS			
Power source			
Maximum Power consumption			
Dimensions (H x W x D)			
Weight			
PAPER SUPPLY OPTIONS			
Plain Pedestal Type - Q2	Substituted for the cassette feeding unit, the pedestal raises the device, without adding further paper capacity.	Booklet Fniisher-Y1 (External)	
Cassette Feeding Unit-AM1	Paper Capacity: 2 x 550 sheets (80 gsm) Paper Type: Thin, Plain, Thick, Colour, Recycled, Pre-punched, Transparency, Bond, Letterhead Paper Size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R, Custom size: 98.0 x 182.0 mm to 304.8 x 457.2mm Paper Weight: 52 to 256 gsm Power Source: From the Main Unit Dimensions (W x D x H): 620 x 700 x 251 mm Weight: Approx. 22.5 kg		
High Capacity Cassette Feeding Unit-A1	Paper Capacity: 2,450 sheets (80 gsm) Paper Type: Thin, Plain, Thick, Colour, Recycled, Pre-punched, Bond, Letterhead Paper Size: A4 Paper Weight: 52 to 256 gsm Power Source: From the Main Unit Dimensions (W x D x H): 620 x 700 x 251 mm Weight: Approx. 30.0 kg	Inner 2/4 Hole Puncher-B1	
Paper Deck Unit - F1	Paper Capacity: 2,700 sheets (80 gsm) Paper Type: Thin, Plain, Thick, Colour, Recycled, Pre-punched, Bond, Letterhead Paper Size: A4, B5 Paper Weight: 52 to 256 gsm Power Source: From the Main Unit Dimensions (W x D x H): 344 x 630 x 440 mm Weight: Approx. 31 kg	Inner 4 Hole Puncher-B1	
OUTPUT OPTIONS		2/4 Hole Puncher Unit-A1	
Copy Tray-J2	Provides a simple tray for basic output needs. Capacity: 100 sheets (A4, 80 gsm)		
Inner 2-Way Tray-J1	Allows the separation of copies, prints and faxes. Adds a second internal output tray to give a combined output capacity of 350 sheets (upper tray 100 sheets/lower tray 250 sheets). (A4, 80 gsm)	4 Hole Puncher Unit-A1	
Inner Finisher-H1 (Internal)	Number of Trays: 2 Upper Tray Capacity*: SRA3, A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R : 45 sheets Lower Tray Capacity*: A4, A5, A5R, B5: 500 sheets, SRA3, A3, A4R, B4, B5R, : 250 sheets, A6R: 30 sheets (64 to 300 gsm) * with 81.4 gsm paper Paper Weight: 52 to 300 gsm Staple Position: Corner, Double Staple Capacity: Corner and Double Stapling: A4/B5: 50 sheets (52 to 90 gsm) A3/B4/A4R: 30 sheets (52 to 90 gsm)	OTHER OPTION Consumables	STAPLE-P1 - For stapling (2 x 5,000 pcs) (for Staple Finisher-Y1/Booklet Finisher-Y1 or Inner Finisher-H1) STAPLE CARTRIDGE-Y1 - For saddle stitching (2 x 2,000 pcs) (for Booklet Finisher-Y1)

For a complete list of all Hardware accessories, please refer to our website specifications page or online product configurator.

Software & Solutions



Certifications and compatibility



Canon Ireland
3006 Lake Drive
Citywest, Saggart
Co. Dublin, Ireland
Telephone No: 01
2052400
Facsimile No: 01 2052525
canon.ie

Canon (UK) Ltd
Woodhatch
Reigate
Surrey RH2 8BF
Telephone No: 01737
220000
Facsimile No: 01737 220022
canon.co.uk

Canon Inc.
canon.com
Canon Europe
canon-europe.com
English edition
© Canon Europa N.V., 2019